UNIVERSITY OF CAMBRIDGE INTERNATIONAL EXAMINATIONS International General Certificate of Secondary Education

DESIGN AND TECHNOLOGY

0445/03

Paper 3 Realisation

May/June 2006

1 hour

Candidates answer on the Question Paper. No Additional Materials are required.

To be taken together with Paper 1 in one session of 2 hours 45 minutes.

READ THESE INSTRUCTIONS FIRST

Write your Centre number, candidate number and name on all the work you hand in. Write in dark blue or black pen in the spaces provided on the Question Paper. You may use a soft pencil for any diagrams, graphs or rough working. Do not use staples, paper clips, highlighters, glue or correction fluid.

Answer two questions.

You may use a calculator.

At the end of the examination, fasten all your work securely together.

The number of marks is given in brackets [] at the end of each question or part question.

FOR EXAMINER'S USE		
1		
2		
3		
4		
TOTAL		

This document consists of 15 printed pages and 1 blank page.



1 Fig. 1 shows a child's desk. The desk top has been removed.

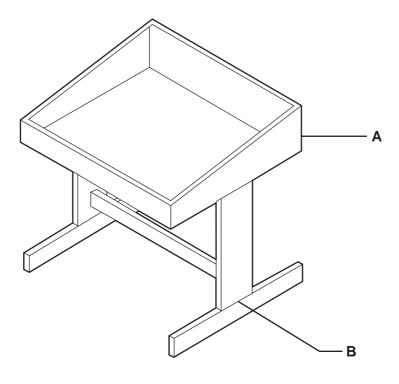


Fig. 1

(a) Give three design requirements for the child's desk.

1		
2		
3		[3]
(i)	Name a suitable hardwood for the desk.	
		[1]
(ii)	Give two reasons for your choice.	

1 ______

2 ______[2]

(b)

(c)	Name and sketch a suitable joint at A.	
	Name	[1]
		[4]
(d)	Name two types of construction that could be used to join the upright to the foot at E	3 .
	1	
	2	[2]
(e)	(i) List four tools for marking out one of the joints you have named in part (d).	
	1	
	4	[4]
	(ii) List four tools used for cutting and fitting the joint you have named in part (d).	
	1	
	2	
	3	
	4	[4]
(f)	Name the adhesive you would use for the joints you have named in part (d) .	
		[1]

(g) (i)	Name a suitable manufactured board for the desk top.
	Manufactured board[1]
(ii)	Use notes and sketches to show how the desk top could be fitted to the desk, and list all the fittings you would use.

[7]

© UCLES 2006 0445/03/M/J/06

2 Fig. 2 shows a bookend made from sheet metal 1.6 mm thick.

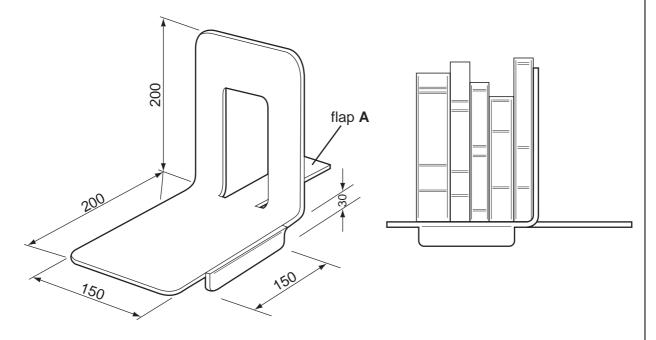


Fig. 2

- (a) The bookend could be made from a ferrous or non-ferrous metal.
 - (i) Name one suitable ferrous metal.

		[1]
(ii)	Name one suitable non-ferrous metal.	

(b) Use notes and sketches to show how the bookend could be marked out on one piece of sheet metal. Indicate the bend lines.

(C)	Name and sketch two tools that could be used to mark out the shape.		
	1	[1]	
		[3]	
	2	[1]	

[3]

(d) Use notes and sketches to show the following stages in producing the bookend:

(i) cut the outline shape of the bookend from the sheet metal;

[3]

(ii) make the edges of the metal safe;

[3]

(iii) bend the metal into the shape required.

[3]

(e)	Use notes and sketches to show how flap A could be cut out of the sheet metal.
	[4]
(f)	Describe how you would finish the bookend made from ${\bf either}$ a ferrous metal ${\bf or}$ a non-ferrous metal.
	Chosen metal
	Description
	[2]

3 Fig. 3 shows views of a self-assembly table made from manufactured board.

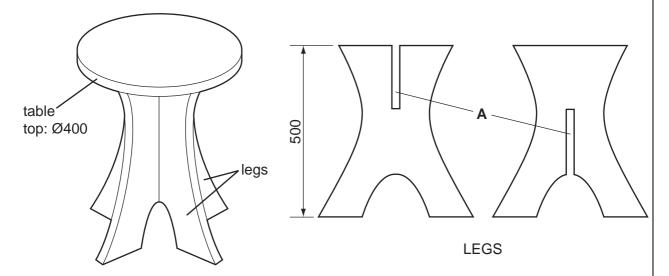


Fig. 3

(a)	(i)	Name a suitable manufactured board for the table.	
			[1]
	(ii)	Give two advantages of using a manufactured board rather than solid wood for table.	the
		1	
		2	[2]
(b)	Sug	ggest suitable thicknesses of manufactured board for the top and the legs.	
	Top)	
	Leg	js	[2]

(c)	Name and sketch two different tools you would use to produce the slot A .		
	1	[1]	
		[3]	
	2	[1]	

[3]

		11	
(d)	The	e legs are to be attached to the top by means of knock-down (K-D) fittings.	
	(i)	Name and sketch a suitable knock-down fitting.	
		Name	[1]
]	[3]
	(ii)	Use notes and sketches to show how the knock-down fittings are used to attach the legs to the top.	ne
		loge to the top.	

(e)	The	e self-assembly table requires an applied finish.	
	(i)	Give two reasons why manufacturers do not apply a finish to the table.	
		1	
		2	2]
	(ii)	Give a reason why it would be an advantage to apply a finish to the table before is assembled.	it
			•••
			[1]
(f)	The	e circular table top would be cut from a square piece of manufactured board.	
	(i)	Name one portable power tool that could be used to cut out the shape.	
			[1]
	(ii)	Describe two safety precautions you would need to take when cutting out the shape.	ιе
		1.	
		2	2]
	(iii)	Use notes and sketches to show how the edge of the top could be made smooth and circular after it has been cut to shape.	th

[4]

4 Fig. 4 shows a cooking tool. The tool could be made from wood, metal or plastic.

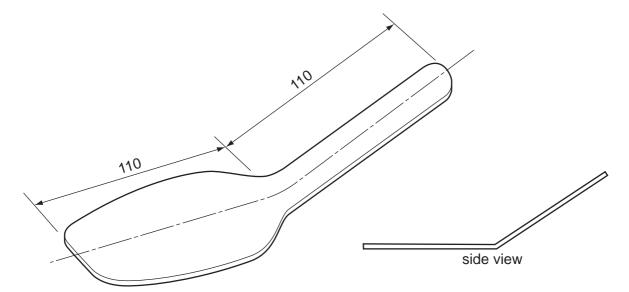


Fig. 4

(a)	Nar	Name a specific material that could be used to make the cooking tool in each case.					
	(i)	wood					
	(ii)	metal					
	(iii)	plastic	[:	3]			
(b)	Giv	e two rea	asons why plastic could be considered the best choice for the cooking tool				
	1						
	2		[2	2]			
(c)		ne two to lastic.	ools that could be used to mark out the shape of the cooking tool on a she	et			
	1						
	2		[2	2]			

((d)	Use	notes	and	sketches	to	show	how:

(i) the plastic could be cut to shape;

[3]

(ii) the edges of the plastic are made smooth and finished;

[4]

(iii) the plastic is heated and bent to the required shape.

[4]

(e)	Describe two safety precautions you would need to take when carrying out any of the operations in part (d) .							
	1							
		[2]						
(f)	The handle of the plastic cooking tool is difficult to grip. Use notes and sketches to lesign a wooden handle that could be fitted to the plastic tool to improve the grip.							
		[8]						
(g)	Recycled plastics could be used as an alternative to the wooden handle in part (f).							
	Give two advantages of using recycled plastics rather than wood.							
	1							
	2	[2]						

BLANK PAGE

Permission to reproduce items where third-party owned material protected by copyright is included has been sought and cleared where possible. Every reasonable effort has been made by the publisher (UCLES) to trace copyright holders, but if any items requiring clearance have unwittingly been included, the publisher will be pleased to make amends at the earliest possible opportunity.